




# Dock-N-Talk™

## Quick Setup Guide

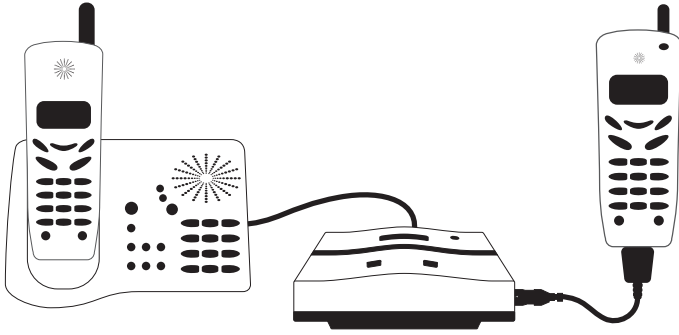

## I. Power

Plug power adapter into the back of the Dock-N-Talk™ (DNT) and into the wall outlet.

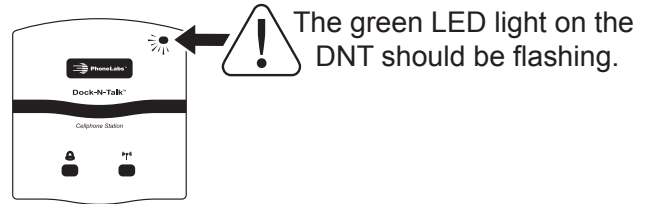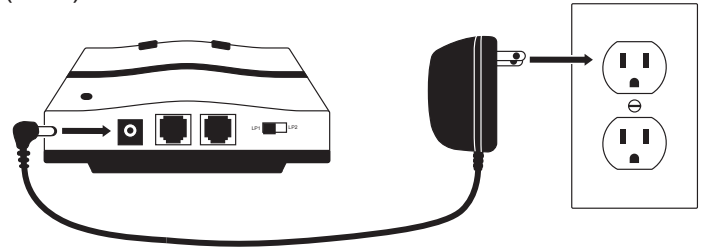


## II. Configuration Options (Decide which one applies: A, B or C)

### A. One phone or one cordless phone base station

1. Use either of the enclosed RJ-11 cords to connect between the back of the DNT (via either modular connector) and the corded or cordless phone.



2. After connecting the DNT to the phone, press the bell button  on the DNT.



The DNT should ring the phone.


3. Pick up the receiver on the phone. The DNT will produce a busy signal when no cell phone is connected.

(Go to step III to connect the cell phone)

### B. Multiple Phones - NO land line

1. Use shorter RJ-11 telephone cord to connect the DNT (via either modular connector) to the corded or cordless phone.

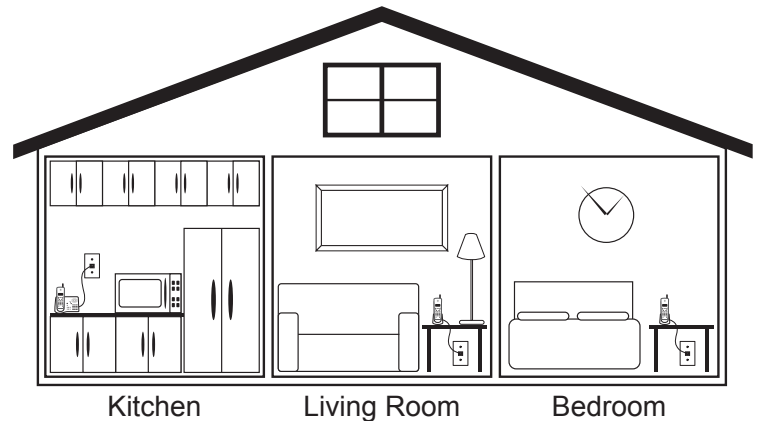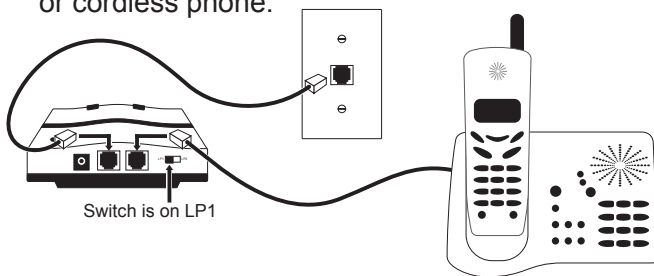

2. Use longer enclosed RJ-11 telephone cord to connect the DNT to the wall telephone jack.
3. After connecting the DNT to the wall, press the bell button  on the DNT. The DNT should ring all the phones that are connected to wall jacks.

4. Pick up the receiver of any phone connected to a wall jack in the home. The DNT will produce a busy signal until the cell phone is connected.

(Go to step III to connect the cell phone)